


FLASHLIGHTS & LASERS



IDENTIFY WITH CERTAINTY

It is critical to positively identify your target and what is behind it and within the immediate area. Assess and proceed accordingly with mounted and handheld solutions or ideally both for the most uncertain of times and situations. Two is one and one is none.

JUMP TO A SERIES

| | |
|--|-----|
| UTG PRO®  M-LOK® LIGHT MOUNT FOR MP5® [NEW] | 160 |
| OFFSET LIGHT MOUNTS | 160 |
| LASERS | 162 |
| BULLDOT® Compact Green Laser | |
| Compact Green Pistol Laser | |
| Compact Red Laser | |
| Sub-compact Red Laser | |
| WEAPON LIGHTS | 163 |
| Sub-compact Pistol Light | |
| Compact Pistol Light | |
| Quick Detach Grip Light | |
| Polymer Grip Light | |
| 2-IN-1 LASER/FLASHLIGHT COMBOS | 163 |
| Light/Red Laser Combo | |
| Light/Green Laser Combo | |
| Sub-compact Light/Red Laser Combo | |

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]





UTG PRO® M-LOK® LIGHT MOUNT FOR MP5®

UTG PRO®  **NEW**

- » Lightweight Matte Black Anodized 6061-T6 Aluminum Construction
- » Securely Attaches to Front Sight, Does Not Interfere with Handguards or Forearms
- » M-LOK® Slots at the 11, 12, and 1 O'clock for Mounting Lights, Pressure Switches, and Other Accessories
- » Compatible with MP5® Pistols and Rifles, Not Compatible with K Pattern Receivers
- » U.S. Patents: www.leapers.com/patents



M-LOK® Slots at the 11, 12, and 1 O'clock for Mounting Lights, Pressure Switches, and Other Accessories



Compatible with MP5® Pistols and Rifles

| | MTU058SSM |
|--------------|---------------------|
| Length | 4.86" (123 mm) |
| Width | 1.56" (40 mm) |
| Height | 0.67" (17 mm) |
| Weight | 1.6 oz (45 g) |
| M-LOK® Slots | 5 (Full) / 1 (Half) |

ADDITIONAL ACCESSORIES

PICATINNY OFFSET RING MOUNT

- » Compatible with 27 mm, 25.4 mm (1"), and 20 mm Flashlight Body Diameters with Use of Included Inserts
- » Matte Black Anodized Aluminum Construction

PICATINNY / RG-FL138



M-LOK® / KEYMOD OFFSET RING MOUNTS

- » Snag-free Melted Contours and Dehorned Corners
- » Matte Black Anodized Aluminum Construction
- » Compatible with 27 mm, 25.4 mm (1"), and 20 mm Body Diameters with Use of Included Inserts

M-LOK® / RG-FL27MC

KEYMOD / RG-FL27KC





LASERS

COMPACT GREEN PISTOL LASER

- » Fits Flush on Most Compact Pistols
- » Class 3R Bright Green Laser
- » Ambidextrous Momentary/Constant On/Off Switches
- » Matte Black Anodized Aluminum Construction
- » Low Profile Picatinny Mount

 / SCP-LS279S-A



COMPACT RED LASER

- » Precise Windage / Elevation Adjustment
- » Powerful Long Range Beam with Pinpoint Accuracy
- » Pressure Switch and Picatinny Ring Mount Included


 / SCP-LS268



SUB-COMPACT RED LASER

- » Class 3R Bright Red Laser
- » Programmable for Constant or Pulse Beam
- » Matte Black Anodized Aluminum Construction
- » Sub-compact 1.19" Length
- » Low Profile Picatinny Mount


 / SCP-LS200

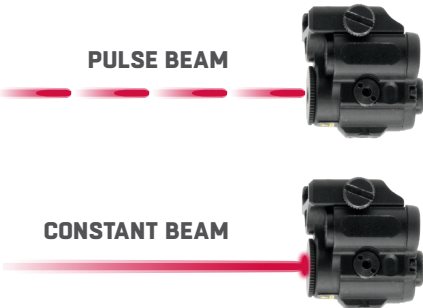

BULLDOT® COMPACT GREEN LASER

- » Expanding Beam Diameter Increases from 1.45" up to 7.3" at 50 Yards for Faster Target Acquisition at Farther Distances
- » Matte Black Anodized Aluminum Construction
- » Constant On/Off Push Button Tail Cap and Pressure Switch Included

 / SCP-LS289S

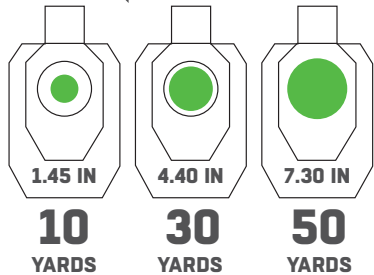

| | SCP-LS289S |
|---------------|---|
| Mount Type | Low Profile Picatinny Mount |
| Laser Range | 328.1 yds (300 m) |
| Beam Diameter | 1.45" (37 mm) @ 10 yds (9.1 m) 4.40" (112 mm) @ 30 yds (27.4 m) 7.3" (185 mm) @ 50 yds (45.7 m) |
| Dimensions | 3.37" x 1.89" x 1.34" (85.5 x 48 x 34 mm) |
| Weight | 4.35 oz (123 g) |
| Laser Battery | CR2 x 1 |

| | SCP-LS279S-A | SCP-LS200 | SCP-LS268 | LT-ELP120R | LT-ELP123R-A | MNT-EL2286PQ-A | LT-ELP38Q-A | LT-ELP39Q-A | LT-ELP28R |
|---------------|--|--|-------------------------------|---|---|--|--|--|---|
| Mount Type | Low Profile Picatinny Mount | Low Profile Picatinny Mount | Slide-on Picatinny Ring Mount | Picatinny | Picatinny | Picatinny QD Lever Lock | Picatinny QD Lever Lock | Picatinny QD Lever Lock | Picatinny |
| Laser Range | 546.8 yds (500 m) | 546.8 yds (500 m) | 546.8 yds (500 m) | N/A | N/A | N/A | 546.8 yds (500 m) | 546.8 yds (500 m) | 164 yds (150 m) |
| Lumen Output | N/A | N/A | N/A | 200 Lumen | 400 Lumen | 400 Lumen | 400 Lumen | 400 Lumen | 120 Lumen |
| Focus | N/A | N/A | N/A | Flood | Flood | Wide Angled Flood | Flood | Flood | Flood |
| Beam Diameter | 1.1" (28 mm) @ 16.4 yds (15 m) | 1.1" (28 mm) @ 16.4 yds (15 m) | 0.6" (16 mm) @ 16.4 yds (15m) | N/A | N/A | N/A | 0.63" (16 mm) @16.4 yds (15 m) | 0.7" (17.8 mm) @16.4 yds (15 m) | 1.1" (28 mm) @16.4 yds (15 m) |
| Dimensions | 2.38" x 1.18" x 1.15" (60.4x 30 x 29.3 mm) | 1.19"x 1.27" x 1.28" (30.2 x 32.2 x 32.5 mm) | 2.59"x 0.79" (65.8 x 20 mm) | 2.98" x 1.12" x 1.13" (75.8 x 28.5 x 28.7 mm) | 3.11" x 1.31" x 1.50" (79 x 33.3 x 38 mm) | 2.80" x 1.77" x 5.34" (71 x 45.8 x 135.7 mm) | 5.12" x 1.92" x 1.27" (130 x 48.8 x 32.3 mm) | 5.35" x 2.24" x 1.28" (136 x 56.8 x 32.5 mm) | 2.04" x 1.97" x 1.69" (51.8 x 50 x 43 mm) |
| Weight | 2.1 oz (61 g) | 1.3 oz (36 g) | 1.1 oz (30g) | 2.6 oz (73 g) | 3.5 oz (100.2 g) | 12 oz (340.2 g) | 7.3 oz (209 g) | 8.6 oz (243 g) | 2.9 oz (83 g) |
| Laser Battery | 1/3N x 1 | LR48 (AG5) x 4 | LR44 x 4 | N/A | N/A | N/A | CR123A x 2 | CR123A x 2 | CR2 x 1 |
| Light Battery | N/A | N/A | N/A | CR2 x 1 | CR2 x 1 | CR123A x 2 | LR44 x 4 | CR2 x 1 | N/A |

WEAPON LIGHTS

SUB-COMPACT PISTOL LIGHT

- » Fits Flush on Most Compact Pistols
- » Ambidextrous Momentary/Constant On/Off Switches
- » Flood Focus 200 Lumen Beam
- » Matte Black Anodized Aluminum Construction
- » IPX7 Waterproof Rated

/ LT-ELP120R



COMPACT PISTOL LIGHT

- » Ambidextrous Momentary/Constant On/Off Switches
- » Rail Inserts Included for Greater Pistol Compatibility
- » Flood Focus 400 Lumen Beam
- » Matte Black Anodized Aluminum Construction

/ LT-ELP123R-A



QUICK DETACH GRIP LIGHT

- » Momentary/Constant On/Off Push Button
- » Flood Focus 400 Lumen Beam
- » Matte black Anodized Aluminum Construction
- » Picatinny Quick Detach Lever Lock Mount
- » US PAT. 8397421

/ MNT-EL2286PQ-A



2-IN-1 LASER/FLASHLIGHT COMBOS

LIGHT/RED LASER COMBO

- » 400 Lumen Flashlight with 3 Hour Runtime and Dual-function Push-button Momentary On/Off and Constant Twist On/Off Activation
- » Class 3R Type Red Laser with Push-button On/Off and 4-point Retention Erector Return Springs for Reliable Zero Hold
- » Adjustable Rotating Laser Bracket Provides 10 Mounting Positions around the Circumference of the Light
- » Patented Quick-detach Lever Lock Picatinny Mount
- » Flashlight and Laser Pressure Switches Included
- » US PAT. 8397421

 / LT-ELP38Q-A



LIGHT/GREEN LASER COMBO

- » 400 Lumen Flashlight with 3 Hour Runtime and Dual-function Push-button Momentary On/Off and Constant Twist On/Off Activation
- » Bright Green Laser with Push-button On/Off and 4-point Retention Erector Return Springs for Reliable Zero Hold
- » Adjustable Rotating Laser Bracket Provides 10 Mounting Positions around the Circumference of the Light
- » Patented Quick-detach Lever Lock Picatinny Mount
- » Flashlight and Laser Pressure Switches Included
- » US PAT. 8397421

 / LT-ELP39Q-A



SUB-COMPACT LIGHT AND RED LASER

- » 120 Lumen Flood Focus Flashlight with Bright Red Laser and 45 Minute Runtime
- » Included Quick-insert Pressure Switch is User Configurable for Simultaneous or Standalone Operation of Light and Laser
- » Integral Weatherproof Plug Replaces Quick-insert Pressure Switch When Not in Use
- » Low Profile Design Mounts Close to Handguard and Bore of Firearm

 / LT-ELP28R

